

1 PIPES

1.1 MATERIALS

The proposed pipes are made of AISI 316 L 2B steel and meet the requirements of EN 1856-1 standard.

1.2 FEATURES


Table 1.1 Flue gas exhaust and combustion air inlet pipes

| Code | Figure | D | L | Clamp (1) | Gasket (2) | Flue gas analysis socket |
|---------|----------|-----|------|-----------|------------|--------------------------|
| OTBO008 | 1.1 p. 1 | 80 | 500 | yes | yes | no |
| OTBO009 | | 80 | 1000 | yes | yes | no |
| OTBO003 | | 110 | 500 | no | yes | no |
| OTBO001 | | 110 | 1000 | no | yes | no |
| OTBO004 | | 130 | 500 | no | yes | no |
| OTBO002 | | 130 | 1000 | no | yes | no |
| OTBO020 | 1.2 p. 1 | 80 | 1000 | yes | no | yes |
| OTBO005 | | 110 | 1000 | no | no | yes |
| OTB0006 | | 130 | 1000 | no | no | yes |

1 Figure 7.1 p. 9.


2 Double lip silicone seal, maximum temperature 230 °C, operating temperature 200 °C.

Figure 1.1 Pipe

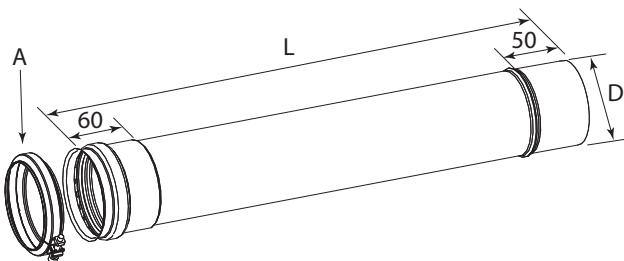

A Pipe clamp (standard for pipes Ø 80 mm)

Figure 1.2 Pipe with flue gas analysis socket

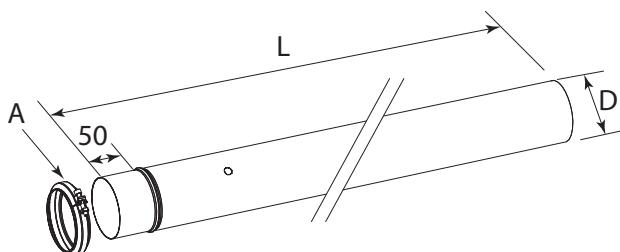

A Pipe clamp (standard for pipes Ø 80 mm)


1.3 ADAPTERS

Table 1.2 Adapters

| Code | Figure | D | d | Gasket (1) |
|---------|----------|-----|----|------------|
| ODTT003 | 1.3 p. 1 | 110 | 80 | yes |
| ODTT004 | | 130 | 80 | yes |

1 Double lip silicone seal, maximum temperature 230 °C, operating temperature 200 °C.

Figure 1.3 Adapter for exhaust/air pipes

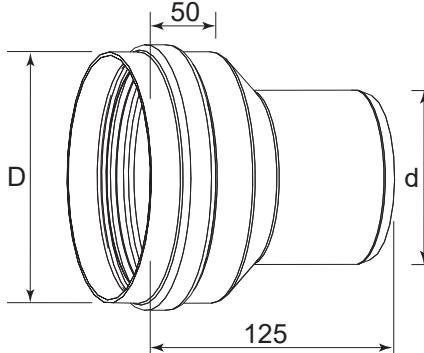

2 ELBOWS

Table 2.1 Flue gas exhaust and combustion air inlet elbows

| Code | Figure | D | Type | Clamp (1) | Gasket (2) |
|---------|----------|-----|------|-----------|------------|
| OCRV006 | 2.1 p. 2 | 80 | 45° | yes | yes |
| OCRV003 | 2.2 p. 2 | 110 | 45° | yes | yes |
| OCRV004 | 2.3 p. 2 | 130 | 45° | yes | yes |
| OCRV007 | 2.4 p. 2 | 80 | 90° | yes | yes |
| OCRV001 | 2.5 p. 2 | 110 | 90° | yes | yes |
| OCRV002 | 2.6 p. 2 | 130 | 90° | yes | yes |
| OCRV013 | 2.7 p. 2 | 80 | 45° | no | yes |

1 Figure 7.1 p. 9.

2 Double lip silicone seal, maximum temperature 230 °C, operating temperature 200 °C.

Figure 2.1 OCRV006

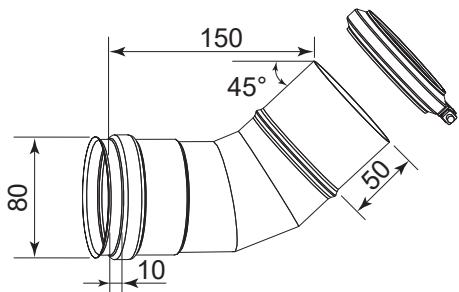


Figure 2.2 OCRV003

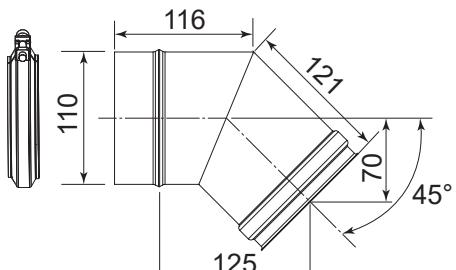


Figure 2.3 OCRV004

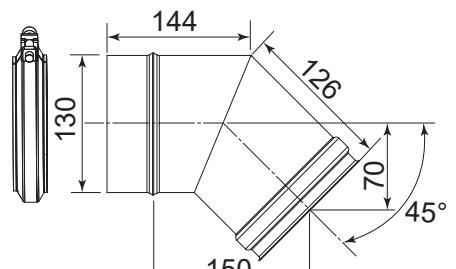


Figure 2.4 OCRV007

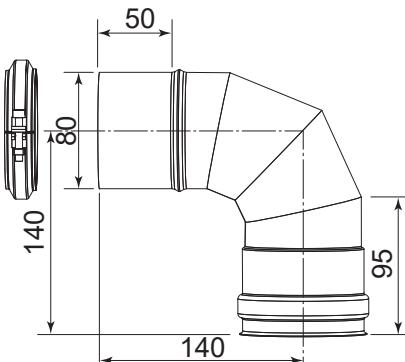


Figure 2.5 OCRV001

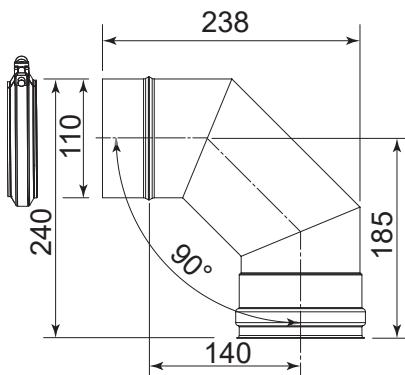


Figure 2.6 OCRV002


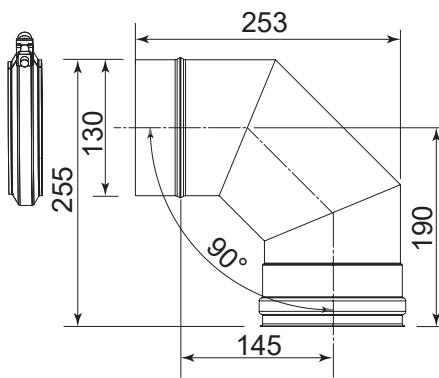


Figure 2.7 OCRV013

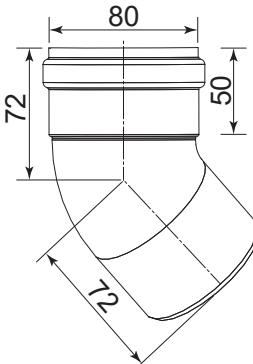

3 SPLIT PIPE KIT

Figure 3.1 OSCR006 split pipe flue gas exhaust

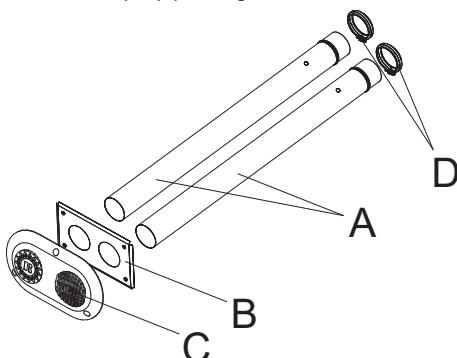


Figure 3.2 OSCR004 split pipe flue gas exhaust

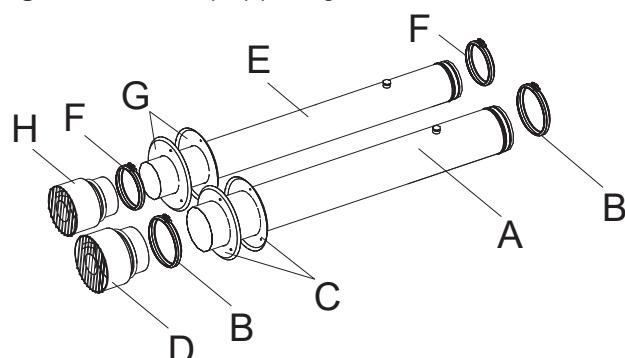


Table 3.1 OSCR006 flue gas exhaust composition

| | Code | D | L | Quantity | Figure |
|----------|---------|----|------|----------|----------|
| A | RTBO116 | 80 | 1000 | 2 | 1.2 p. 1 |
| B | RRSN000 | - | - | 1 | - |
| C | RTRM029 | - | - | 1 | 6.3 p. 8 |
| D | NFSC010 | 80 | - | 2 | 7.1 p. 9 |

Table 3.2 OSCR004 flue gas exhaust composition

| | Code | D | L | Quantity | Figure |
|----------|---------|-----|------|----------|----------|
| A | RTBO790 | 130 | 1000 | 1 | - |
| B | NFSC001 | 130 | - | 2 | 7.1 p. 9 |
| C | RRSN003 | 130 | - | 2 | - |
| D | KTRM008 | 130 | - | 1 | - |
| E | RTBO790 | 110 | 1000 | 1 | - |
| F | NFSC000 | 110 | - | 2 | 7.1 p. 9 |
| G | RRSN002 | 110 | - | 2 | - |
| H | KTRM009 | 110 | - | 1 | - |

4 COAXIAL FLUE GAS EXHAUSTS

For the identification of coaxial ducts, the first number refers to the connection diameter of the individual ducts, while the second refers to the diameter of the coaxial duct.

For example Ø 80/125 refers to a coaxial duct with connection diameters of the individual air/exhaust ducts 80 mm and coaxial duct diameter 125 mm.

Table 4.1 Coaxial flue gas exhausts (models in production)

| | Wall coaxial | | | Roof coaxial | | |
|--------------|------------------------|-------------------------|------------------------|-------------------------|-------------------------|-------------------------|
| | OSCR007 Ø 80/125 mm | OKTC004 Ø 130/180 mm | OSCR008 Ø 80/125 mm | OSCR009 Ø 100/150 mm | OKTC001 Ø 130/210 mm | OSCR002 Ø 130/210 mm |
| Next-R15 | . | . | . | . | . | - |
| Next-R20 | . | . | . | . | . | - |
| Next-R30 | . | . | . | . | . | - |
| Next-R40 | . | . | . | . | . | - |
| Next-R50 | . | . | . | . | . | - |
| Next-R60 | - | . | - | . | . | - |
| Next-R80 | - | . | - | . | . | - |
| Next-G 20 EC | . | . | . | . | . | - |
| Next-G 30 | . | . | . | . | . | - |
| Next-G 35 EC | . | . | . | . | . | - |
| Next-G 45 | . | . | . | . | . | - |
| Next-G 60 | . | . | . | . | . | - |
| Next-G 75 EC | . | . | . | . | . | - |
| Next-G 90 | . | . | . | . | . | - |
| M20 | - | - | - | - | - | . |
| M25 | - | - | - | - | - | . |
| M30 | - | - | - | - | - | . |
| M35 | - | - | - | - | - | . |
| M40 | - | - | - | - | - | . |
| M50 | - | - | - | - | - | . |
| M60 | - | - | - | - | - | . |

- Applicable
- Not applicable


Table 4.2 Coaxial flue gas exhausts (models out of production)

| | Wall coaxial | | Roof coaxial | | |
|------|------------------------|-------------------------|------------------------|-------------------------|-------------------------|
| | OSCR012 Ø 80/125 mm | OSCR011 Ø 130/180 mm | OSCR008 Ø 80/125 mm | OSCR009 Ø 100/150 mm | OKTC001 Ø 130/210 mm |
| G30 | . | . | . | . | . |
| G45 | . | . | . | . | . |
| G60 | . | . | - | . | . |
| G100 | . | . | - | . | . |
| K32 | . | . | . | . | . |
| K45 | . | . | . | . | . |
| K60 | - | . | - | . | . |
| K100 | - | . | - | - | . |

• Applicable
- Not applicable




4.1 WALL

4.1.1 OSCR012

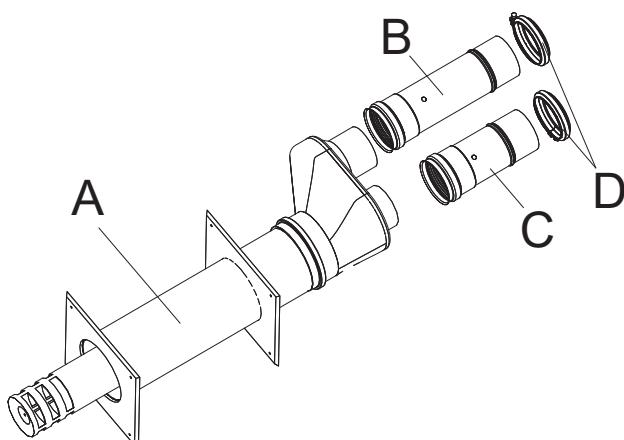Figure 4.1 OSCR012 wall coaxial flue gas exhaust**Table 4.3** OSCR012 flue gas exhaust composition

| | Code | D | L | Quantity | Figure |
|---|-------------|-----|-----|----------|----------|
| A | RTBO122 | 125 | 780 | 1 | 4.2 p. 4 |
| B | RTBO559 (1) | 80 | 275 | 1 | 4.3 p. 4 |
| C | RTBO124 (1) | 80 | 195 | 1 | 4.4 p. 4 |
| D | NFSC010 | 80 | - | 2 | 7.1 p. 9 |

1 Complete with double lip silicone seal, maximum temperature 230 °C, operating temperature 200 °C.

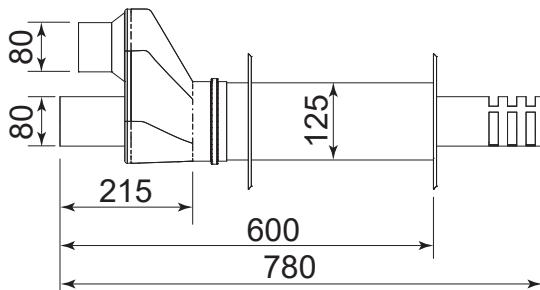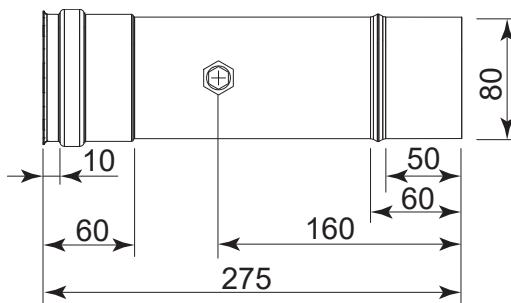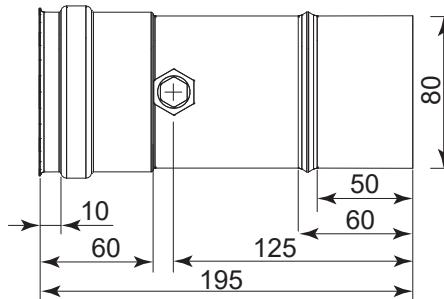Figure 4.2 RTBO122**Figure 4.3** RTBO559**Figure 4.4** RTBO124

4.1.2 OSCR011

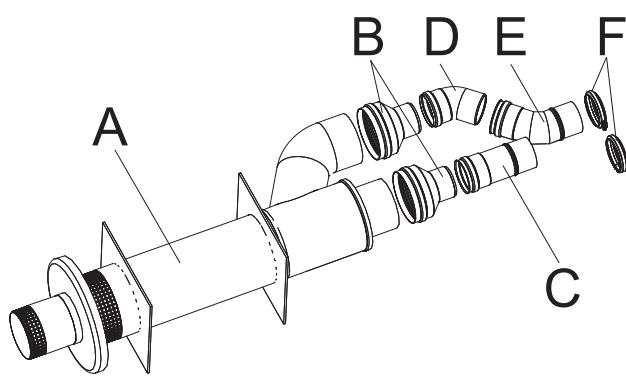
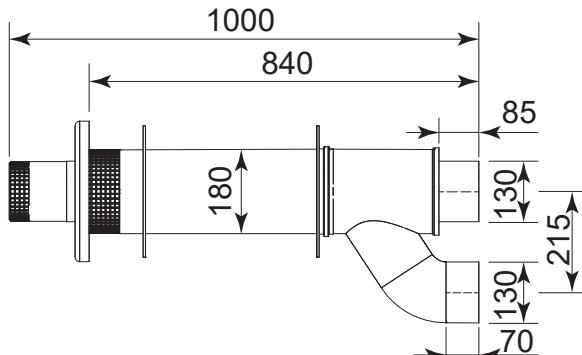
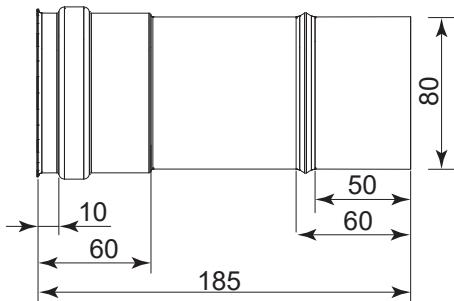
Figure 4.5 OSCR011


Table 4.4 OSCR011 flue gas exhaust composition

| | Code | D | L | Quantity | Figure |
|---|-------------|--------|------|----------|----------|
| A | KOPT034 | 180 | 1000 | 1 | 4.6 p. 5 |
| B | RDTT008 | 130/80 | - | 2 | 1.3 p. 1 |
| C | RTBO160 (1) | 80 | 185 | 1 | 4.7 p. 5 |
| D | RCRV027 | 80 | - | 1 | 2.7 p. 2 |
| E | RCRV015 | 80 | - | 1 | 2.1 p. 2 |
| F | NFSC010 | 80 | - | 2 | 7.1 p. 9 |

1 Complete with double lip silicone seal, maximum temperature 230 °C, operating temperature 200 °C.

Figure 4.6 KOPT034**Figure 4.7** RTBO160


4.1.3 OSCR007

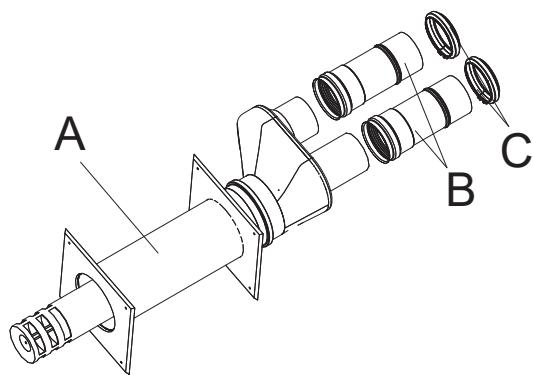Figure 4.8 OSCR007**Table 4.5** OSCR007 flue gas exhaust composition

| | Code | D | L | Quantity | Figure |
|---|-------------|-----|-----|----------|----------|
| A | RTBO122 | 125 | 780 | 1 | 4.2 p. 4 |
| B | RTBO124 (1) | 80 | 195 | 2 | 4.4 p. 4 |
| D | NFSC010 | 80 | - | 2 | 7.1 p. 9 |


1 Complete with double lip silicone seal, maximum temperature 230 °C, operating temperature 200 °C.

4.1.4 OKTC004

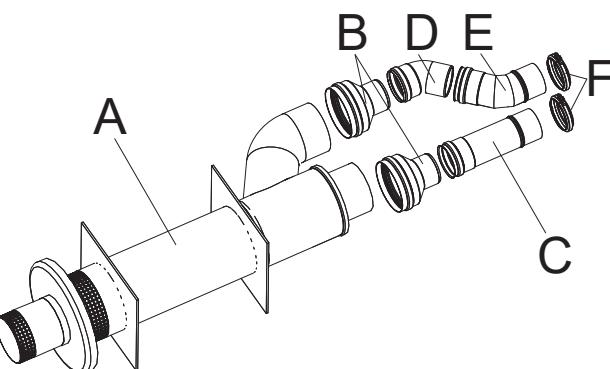Figure 4.9 OKTC004**Table 4.6** OKTC004 flue gas exhaust composition

| | Code | D | L | Quantity | Figure |
|---|-------------|--------|------|----------|-----------|
| A | KOPT034 | 180 | 1000 | 1 | 4.6 p. 5 |
| B | RDTT008 | 130/80 | - | 2 | 1.3 p. 1 |
| C | RTBO117 (1) | 80 | 250 | 1 | 4.10 p. 5 |
| D | RCRV027 | 80 | - | 1 | 2.7 p. 2 |
| E | RCRV015 | 80 | - | 1 | 2.1 p. 2 |
| F | NFSC010 | 80 | - | 2 | 7.1 p. 9 |

1 Complete with double lip silicone seal, maximum temperature 230 °C, operating temperature 200 °C.

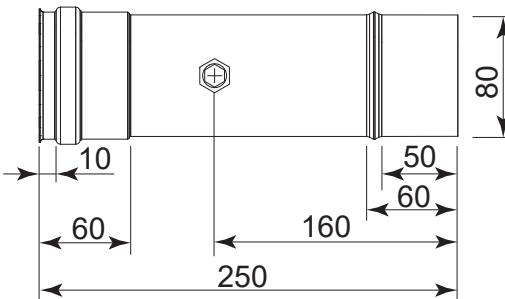
Figure 4.10 RTBO117

The OKTC004 wall coaxial flue gas exhaust can only be installed using the OSTF009 support bracket, available as optional.

If the OKTC004 wall coaxial flue gas exhaust is used for the installation of R15, R20 and G 20 EC gas unit heaters, there must be at least 800 mm between the rear panel of the gas unit heater and the wall (Figure 4.11 p. 6).

Consequently, it is not possible to secure the gas unit heater to the wall by means of the revolving wall support bracket OSTF020, if the coaxial wall flue gas exhaust OKTC004 is to be positioned on the same wall.

Figure 4.11 Minimum distance for installation with Next-R15/R20 and Next-G 20 EC

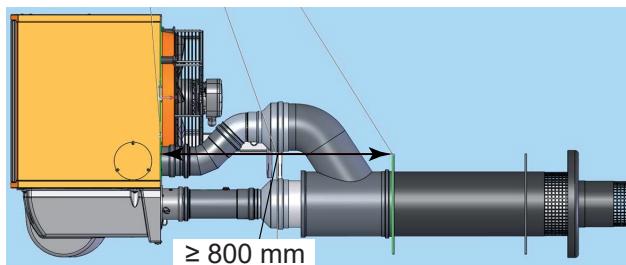

4.2 ROOF

4.2.1 OSCR008

Figure 4.12 OSCR008


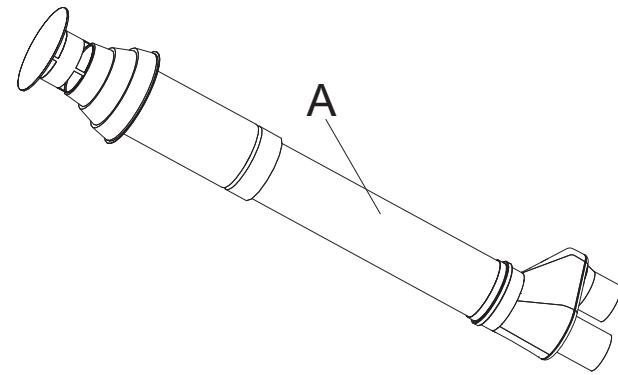


Table 4.7 OSCR008 flue gas exhaust composition

| | Code | D | L | Quantity | Figure |
|----------|---------|-----|------|----------|-----------|
| A | RTBO123 | 125 | 1280 | 1 | 4.13 p. 6 |

Figure 4.13 RTBO123

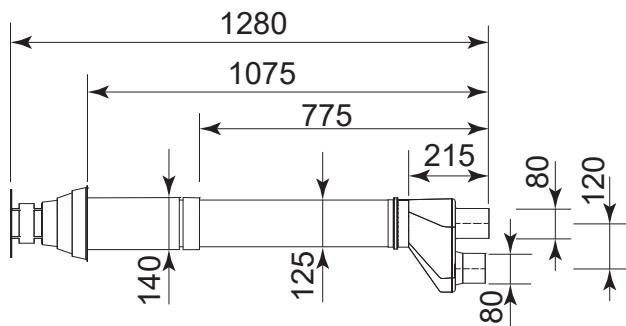

4.2.2 OSCR009

Figure 4.14 OSCR009

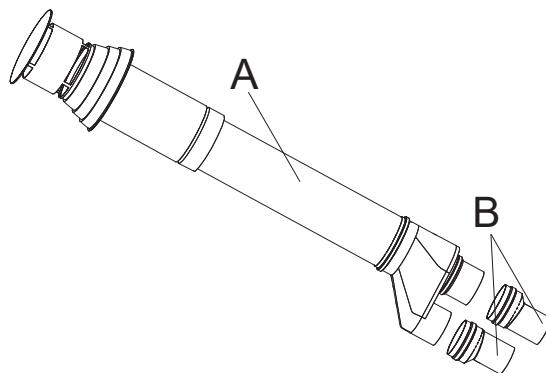


Table 4.8 OSCR009 flue gas exhaust composition

| | Code | D | L | Quantity | Figure |
|----------|-------------|--------|------|----------|-----------|
| A | RTBO129 | 150 | 1360 | 1 | 4.15 p. 6 |
| B | RDTT004 (1) | 100/80 | 150 | 2 | 4.16 p. 6 |

1 Complete with double lip silicone seal, maximum temperature 230 °C, operating temperature 200 °C.

Figure 4.15 RTBO129





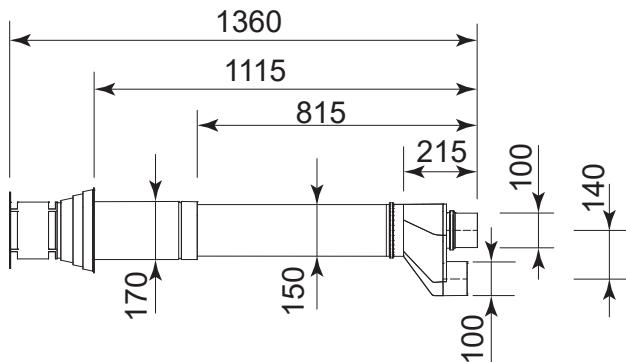


Figure 4.16 RDTT004

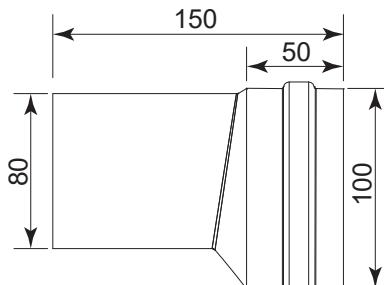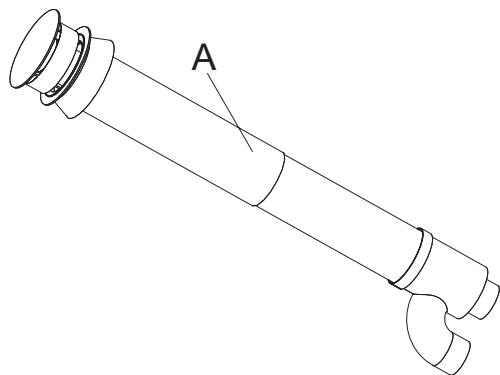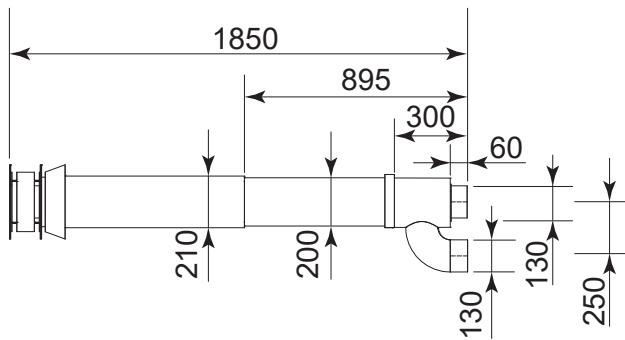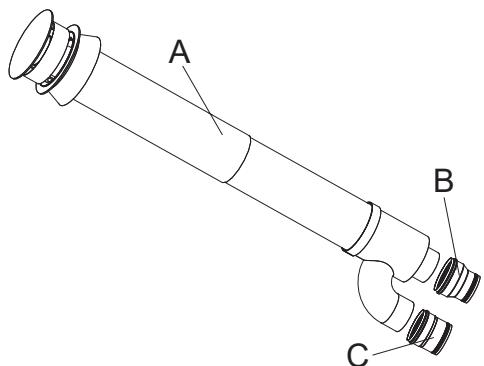



4.2.3 OKTC001**Figure 4.17 OKTC001****Table 4.9 OKTC001 flue gas exhaust composition**

| | Code | D | L | Quantity | Figure |
|---|---------|-----|------|----------|-----------|
| A | KOPT033 | 210 | 1850 | 1 | 4.18 p. 7 |

Figure 4.18 KOPT033**4.2.4 OSCR002****Figure 4.19 OSCR002****Table 4.10 OSCR002 flue gas exhaust composition**


| | Code | D | L | Quantity | Figure |
|---|-------------|---------|------|----------|-----------|
| A | KOPT033 | 210 | 1850 | 1 | 4.18 p. 7 |
| B | RDTT003 (1) | 110/130 | 125 | 1 | 4.21 p. 7 |
| C | RDTT002 (1) | 130/134 | 125 | 1 | 4.20 p. 7 |

1 Complete with double lip silicone seal, maximum temperature 230 °C, operating temperature 200 °C.

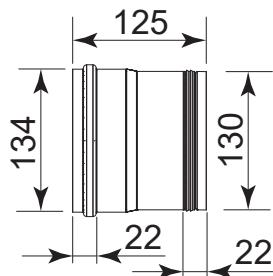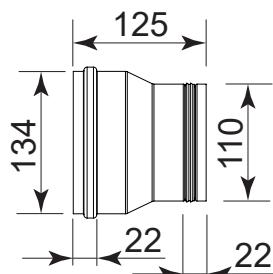Figure 4.20 RDTT002**Figure 4.21 RDTT003**

5 T CONNECTORS

Figure 5.1 T connector

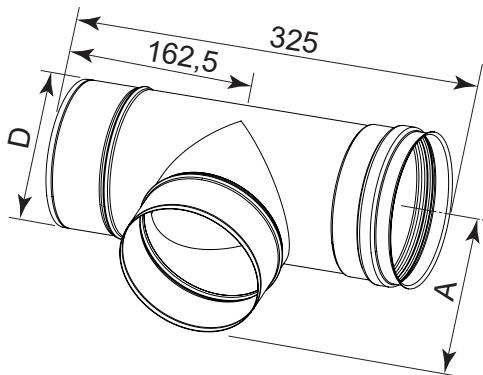

5.1 CAPS FOR T CONNECTORS

Figure 5.2 Cap for T connector

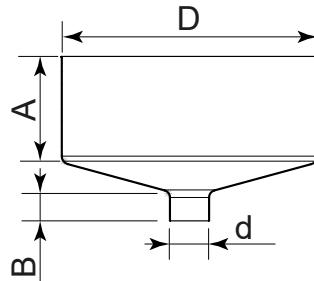


Table 5.1 T connectors

| Code | Figure | D | A | Clamp (1) | Gasket (2) |
|---------|----------|-----|-----|-----------|------------|
| ORCC002 | 5.1 p. 8 | 80 | 170 | yes | yes |
| ORCC000 | | 110 | 135 | yes | yes |
| ORCC001 | | 130 | 135 | yes | yes |

1 Figure 7.1 p. 9.

2 Double lip silicone seal, maximum temperature 230 °C, operating temperature 200 °C.

Table 5.2 Caps for T connectors

| Code | Figure | D | d | A | B | Clamp (1) |
|-------------|----------|-----|------|----|----|-----------|
| OTPP002 (2) | 5.2 p. 8 | 80 | 3/4" | 52 | 16 | yes |
| OTPP000 | | 110 | 3/4" | 57 | 24 | yes |
| OTPP001 | | 130 | 20 | 54 | 14 | yes |

1 Figure 7.1 p. 9.

2 Complete with double lip silicone seal, maximum temperature 230 °C, operating temperature 200 °C.

6 TERMINALS

6.1 ROOF

Table 6.1 Roof terminals

| Code | Figure | A | B | C | D | E | F |
|-------------|----------|-----|-----|-----|-----|----|----|
| OTRM004 (1) | 6.1 p. 8 | 200 | 185 | 130 | 80 | 95 | 55 |
| OTRM000 | | 300 | 210 | 165 | 110 | 80 | 45 |
| OTRM001 | | 300 | 185 | 140 | 130 | 80 | 45 |

1 Complete with clamp, refer to Figure 7.1 p. 9.

Figure 6.1 Roof terminal

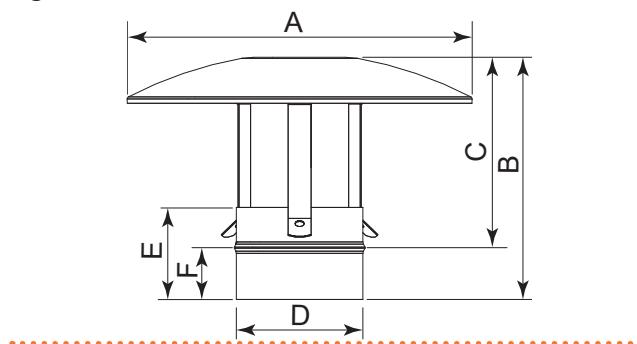


Figure 6.2 Wall terminal


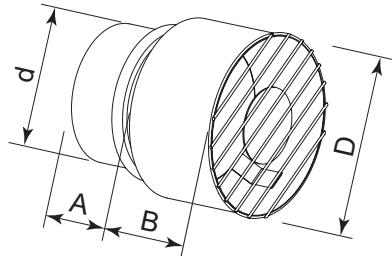


Figure 6.3 OTRM005 double die-cast wall mounted terminal

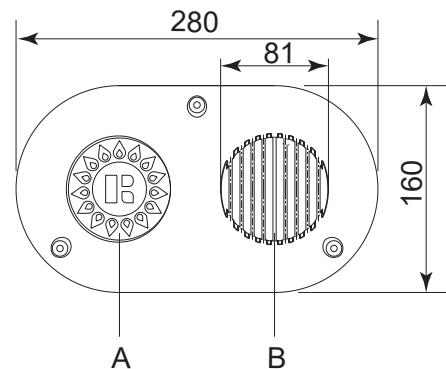

A Combustion air inlet

B Flue gas exhaust

The terminal protrudes from the wall 22 mm.

6.2 WALL

Table 6.2 Wall terminal

| Code | Figure | D | d | A | B |
|-----------|----------|-----|-----|----|----|
| O12141320 | 6.2 p. 8 | 109 | 79 | 69 | 80 |
| O12141330 | | 141 | 109 | 69 | 80 |
| O12141340 | | 162 | 129 | 69 | 80 |

The die-cast terminal is not applicable to the M series.

7 PIPE CLAMPS

Figure 7.1 Pipe clamp




Table 7.1 Pipe clamps

| Code | Figure | D |
|---------|----------|-----|
| OFSC000 | | 110 |
| OFSC001 | 7.1 p. 9 | 130 |
| OFSC010 | | 80 |

8 PIPE ADAPTERS

The adapters allow the connection between M and M C series gas unit heaters and commercially available pipes.

Table 8.1 Pipe adapters

| Code | Figure | D | d |
|-------------|----------|-----|-----|
| OTBO011 (1) | 8.1 p. 9 | 111 | 110 |
| OTBO012 (1) | | 131 | 130 |

1. Complete with external o-ring (gas unit heater side) and internal double lip silicone seal, maximum temperature 230 °C, operating temperature 200 °C.

Figure 8.1 Pipe adapter

